


## バリングパンチ



**MBB T-MBB**

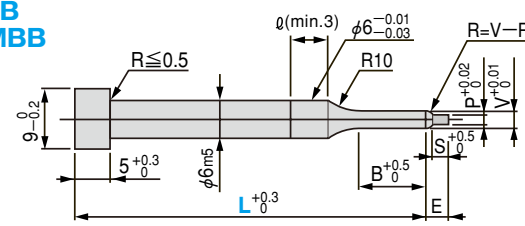
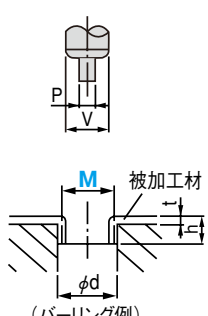
**材質** SKD11 相当    **硬度** 60 ~ 63HRC

**T-MBB**

**材質** SKD11 相当    **硬度** 60 ~ 63HRC ・ 表面 3000HV    **表面処理** TiC

**KBB**

**材質** SKH51    **硬度** 61 ~ 64HRC

●規格仕様

カタログ No.		L	記号	V	P	B	S	E	M × P	d: ダイ内径, h: バリング高さ, 被加工材 :SPCC(実験値)							
記号	M									記号	t	0.6	0.8	1.0	1.2	1.6	2.0
MBB T-MBB	2.6	41	A	2.22	1.5	6	2	2.7	M2.6 × 0.45	A	d	3.12	3.34	3.72			
			B	2.25						d	3.15	3.37	3.75				
			C	2.32						h	1.3	1.47	1.77				
			D	2.35						d	3.22	3.44	3.82				
MBB T-MBB KBB	3		A	2.59	1.9	8	3	3.6	M3 × 0.5	A	d	3.49	3.79	3.99	4.39		
			B	2.63						h	1.3	1.55	1.75	2.05			
			C	2.72						d	3.53	3.83	4.03	4.43			
			D	2.76						h	1.35	1.6	1.75	2.07			
	4	A	3.39	2.4	8	3	3.9	M4 × 0.7	A	d	4.29	4.59	4.79	5.07	5.79		
		B	3.44						h	1.5	1.77	2.0	2.17	2.6			
		C	3.64						d	4.34	4.64	4.84	5.12	5.84			
		D	3.69						h	1.5	1.77	2.0	2.2	2.65			
	5	A	4.33	2.8	4	4	5.4	M5 × 0.8	A	d			5.83	6.01	6.57	7.33	
		B	4.38						h			2.27	2.47	2.85	3.5		
		C	4.62						d			5.88	6.06	6.62	7.38		
		D	4.67						h			2.3	2.52	2.9	3.52		
								C	d			6.12	6.30	6.86	7.62		
								h				2.42	2.65	3.0	3.62		
								D	d			6.17	6.35	6.91	7.67		
								h				2.45	2.7	3.05	3.65		

**Order 注文例**    形式 No - L - Type  
MBB4 - 71 - A

**Delivery 納期**    4日目着  
(又は4日目発送)

刻  
特  
印  
殊  
バ  
ン  
チ  
・  
プ  
ン  
チ