


GUIDE LIFTER

ボールプランジャ

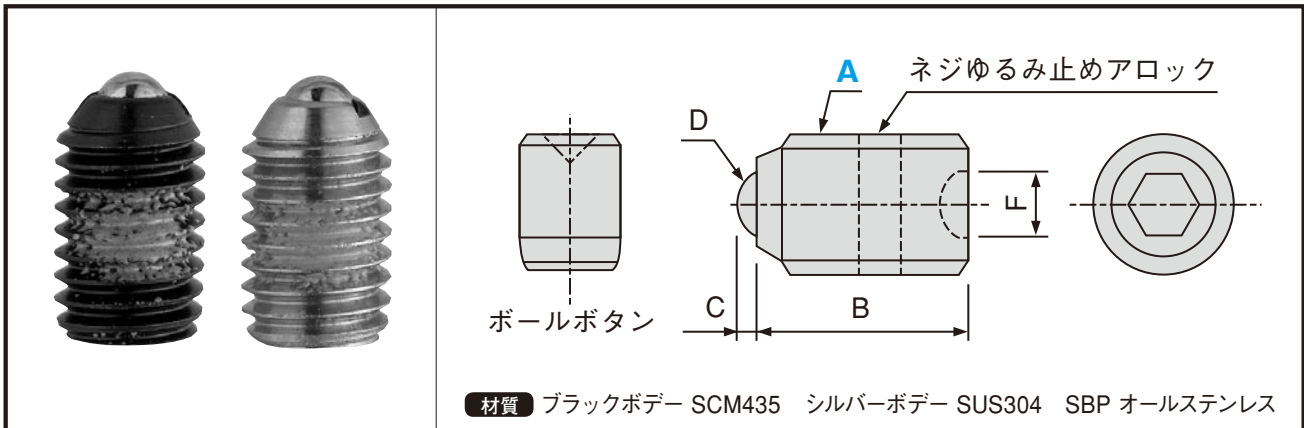

●規格仕様

	カタログ No.	A	B	C	D	F	スプリング圧 (kgf)	
							Min/Max	
BP-□L ブラックボデー (軽荷重用)	BP-4L	M4 × 0.7	9.0	0.8	2.5	1.5	0.2/0.5	
	BP-5L	M5 × 0.8	12.0	0.8	3.0	2.5	0.3/1.0	
	BP-6L	M6 × 1.0	13.0	0.8	3.0	3.0	0.5/1.5	
	BP-8L	M8 × 1.25	15.0	1.0	4.0	4.0	0.7/2.0	
	BP-10L	M10 × 1.5	16.0	1.2	5.0	5.0	0.9/2.5	
	BP-12L	M12 × 1.75	20.0	1.8	7.0	6.0	1.0/3.0	
	BP-16L	M16 × 2.0	25.0	2.5	9.5	8.0	1.6/5.0	
BP-□H シルバーボデー (重荷重用)	BP-3H	M3 × 0.5	7.0	0.5	1.5	1.5	0.15/0.3	
	BP-4H	M4 × 0.7	9.0	0.8	2.5	2.0	0.4/1.0	
	BP-5H	M5 × 0.8	12.0	0.8	3.0	2.5	0.5/2.0	
	BP-6H	M6 × 1.0	13.0	0.8	3.0	3.0	1.0/3.0	
	BP-8H	M8 × 1.25	15.0	1.0	4.0	4.0	1.3/4.0	
	BP-10H	M10 × 1.5	16.0	1.2	5.0	5.0	1.9/4.0	
	BP-12H	M12 × 1.75	20.0	1.8	7.0	6.0	2.0/6.0	
SBP-□ オールステンレス	SBP-4	M4 × 0.7	9.0	0.8	2.5	2.0	0.3/0.8	
	SBP-5	M5 × 0.8	12.0	0.8	3.0	2.5	0.4/1.2	
	SBP-6	M6 × 1.0	13.0	0.8	3.0	3.0	0.7/2.3	
	SBP-8	M8 × 1.25	15.0	1.0	4.0	4.0	1.0/3.0	
	SBP-10	M10 × 1.5	16.0	1.2	5.0	5.0	1.2/3.8	
	SBP-12	M12 × 1.75	20.0	1.8	7.0	6.0	1.5/4.5	
	SBP-16	M16 × 2.0	25.0	2.5	9.5	8.0	2.5/7.5	

Order 注文例	形式
	例 SBP-16

Delivery 納期	2日目着
	(又は2日目発送)