


ストリッパガイドピン (ヘッド付タイプ: 油溝付)

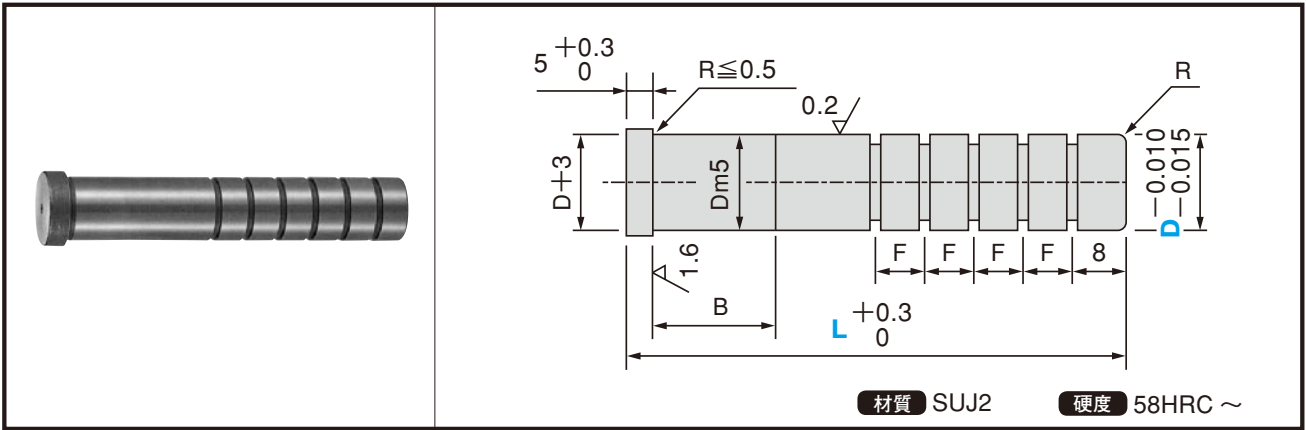

●規格仕様

GROOVE (溝) ...n (コ)					
n					
D \ n	40 ~	50 ~	70 ~	80 ~	90 ~
8	2	3	4	5	6
10	2	3	4	5	6
13	2	3	4	5	6
16	2	3	4	5	6
20	2	3	4	5	6
25	2	3	4	5	6

L 40 ~ 110 → F = 8
L120 ~ Lmax → F = 10

●規格仕様

D m5	8		10		13		16		20		25				
	+0.012		+0.015		+0.017		+0.017		+0.017		+0.017				
R	+0.006		+0.007		+0.007		+0.007		+0.008		+0.008				
B	1.0		1.5		2.0		2.0		2.0		2.0				
カタログ No.		TYPE		QTOH											
		D		8		10		13		16		20		25	
L	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50
	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
		70	70	70	70	70	70	70	70	70	70	70	70	70	70
		80	80	80	80	80	80	80	80	80	80	80	80	80	80
				90	90	90	90	90	90	90	90	90	90	90	90
				100	100	100	100	100	100	100	100	100	100	100	100
						110	110	110	110	110	110	110	110	110	110
						120	120	120	120	120	120	120	120	120	120
								130	130	130	130	130	130	130	130
								140	140	140	140	140	140	140	140

●追加工

追加工	型式	Spec.
	LC	全長変更 指定0.5mm単位 40 ≤ LC < L B寸法は規格とおりです。 ❗ 規格最短Lより短くする変更の場合、必要に応じてBCを併用してください。
	BC	B寸法変更 指定1mm単位 0 ≤ BC < D × 2 ❗ 全長Lは指定寸法とおりです。

Order 注文例 **形式D-全長L**
例 QTOH13-100

Delivery 納期
2日目着
(又は2日目発送)
追加工付き4日目着
(又は4日目発送)