


GUIDE POSTS & BUSHINGS

ダイセット用ガイドポスト


着脱ポスト




TMRP

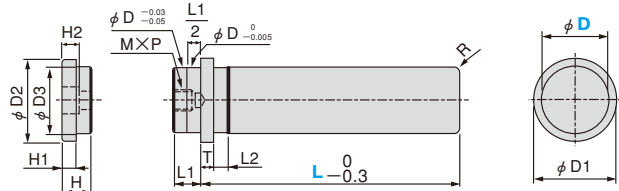

TBRPM
(可動ストップ)
TSTM 用

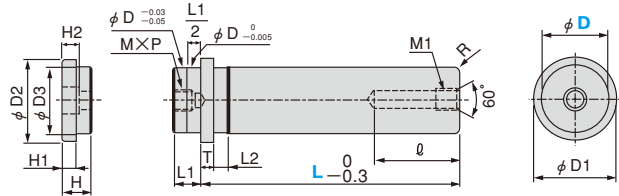

TBRPK
(固定ストップ)
TSTK 用

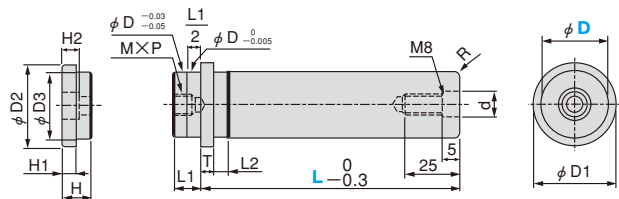


材質 SUJ2 硬度 58HRC ~ (高周波焼入)


圧入ポスト




TMSP

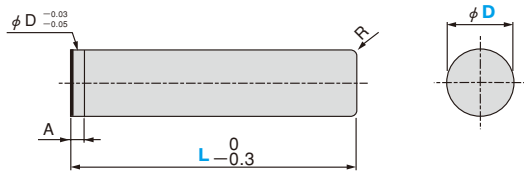

TBSPM
(可動ストップ)
TSTM 用

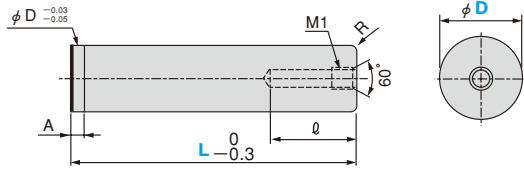

TBSPK
(固定ストップ)
TSTK 用

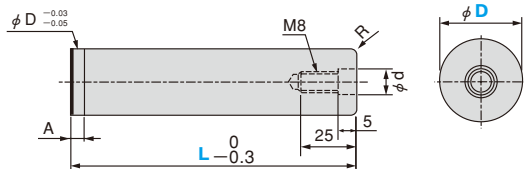


材質 SUJ2 硬度 58HRC ~ (高周波焼入)

GUIDE POSTS & BUSHINGS

●規格仕様

D	D1	T	L1	L2	ℓ	M1 × P	d	A	M	R	D2	D3	H	H1	H2	付属ボルト	
20	+0.020	29	5	15		38	14	4	M8 × 18	2.0	28	19.5	14	7	8.5	RCS 8 - 25	
22	+0.015	31	8	16	10	42					3.0	30					21.5
25		36				18						50					35
28	+0.025	39	10	20	12	50	5	M10 × 22	3.5	36	27.5	16	8	10.5	RCS10 - 30		
32	+0.020	44				23				60	40					31.5	
38	+0.030	53	12	27	15	60	20	6	M12 × 27	4.0	49	37.5	18	10	12.5	RCS12 - 35	
45	+0.025	59				32					70	55					44.5
50	+0.035	69	15	35	15	70	7	M14 × 31	5.0	62	49.5	20	12	14.5	RCS14 - 40		
60	+0.030	79				42				70	72					59.5	

 Order 注文例	形式 D - 全長 L
	例 TBRPK50 - 220

 Delivery 納期	2 日目着
	(又は 2 日目発送)

ガスト
ライド
ポスト・
ブシ
ユ