



GUIDE POSTS & BUSHINGS

ダイセット用ボールリテーナ

ガイドポスト・ブッシュ

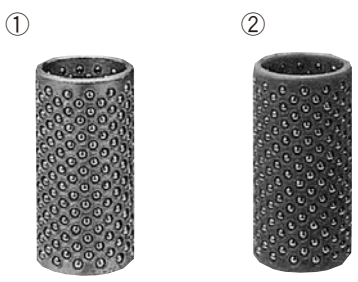


BSAH (高剛性・アルミ製ボールリテーナ)
BSJH (高剛性・樹脂製ボールリテーナ)

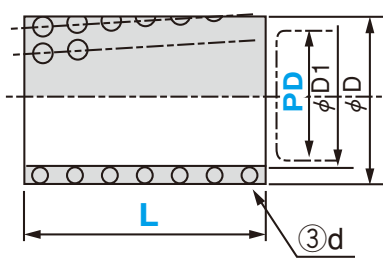


材質 ① A5052S(アルミニウム)
 ② POM(ポリアセタール樹脂)
 ③ SUJ2 真球度 0.25μm

硬度 ③ 62 ~ 67HRC

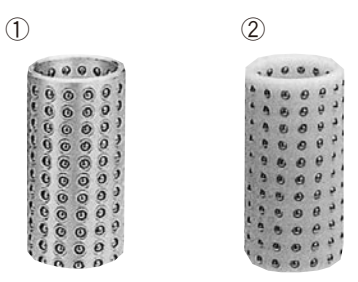

TMBS (アルミ製ボールリテーナ)
TMBJ (樹脂製ボールリテーナ)

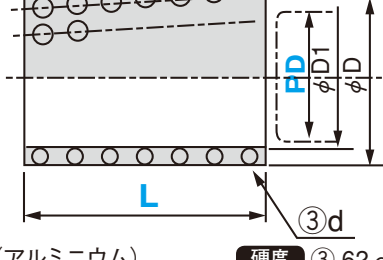


材質 ① A5052S(アルミニウム)
 ② POM(ポリアセタール樹脂)
 ③ SUJ2 真球度 0.25μm

硬度 ③ 62 ~ 67HRC

●規格仕様

PD 適用ポスト径	外径 φ D	内径 φ D1	ボール径 φ d	ボール数			カタログ No.		L	
				BSAH BSJH	TMBS TMBJ	比率	タイプ	PD		
20	+0.020 +0.015	25.5	20.5	3	165	96	1.72	BSAH (アルミ製)	20	50
					180	112	1.61		22	50
					228	140	1.63		60	60
					266	160	1.66		25	60
25	+0.025 +0.020	30.5	25.5	4	350	208	1.68	BSJH (樹脂製)	28	60
					204	126	1.62		75	75
					252	154	1.64		32	75
					294	176	1.67		90	90
28	+0.030 +0.025	35.5	28.5	5	350	208	1.68	TMBS (アルミ製)	38	75
					238	144	1.65		90	90
					294	176	1.67		45	90
					336	198	1.70		110	110
32	+0.035 +0.030	39.5	32.5	5	400	234	1.71	TMBJ (樹脂製)	50	90
					450	260	1.73		110	110
					420	242	1.74		60	90
					500	286	1.75		110	110
38	+0.030 +0.025	47.5	38.5	5	420	242	1.74		60	90
					450	260	1.73		110	110
					420	242	1.74		60	90
					500	286	1.75		110	110
45	+0.035 +0.030	54.5	45.5	5	420	242	1.74		60	90
					450	260	1.73		110	110
					420	242	1.74		60	90
					500	286	1.75		110	110
50	+0.035 +0.030	59.5	50.5	5	420	242	1.74		60	90
					450	260	1.73		110	110
					420	242	1.74		60	90
					500	286	1.75		110	110
60	+0.035 +0.030	69.5	60.5	5	420	242	1.74		60	90
					450	260	1.73		110	110
					420	242	1.74		60	90
					500	286	1.75		110	110

 Order 注文例	形式 例 TMBJ28 - 75
--	-----------------------------------

 Delivery 納期	2日目着 (又は2日目発送)
--	-------------------