


COIL SPRING

丸線コイルスプリング WTT

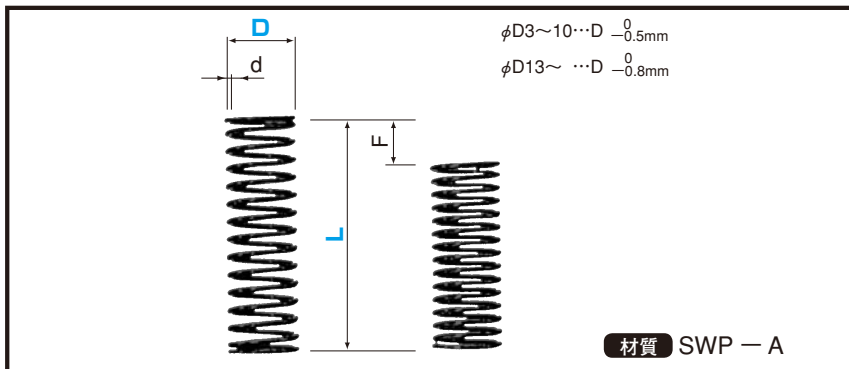

●規格仕様

D \ TYPE	WRR	WFF	WLL	WTT	WMM	WHH
3	kgf/1mm 0.03	kgf/1mm 0.05	kgf/1mm 0.1	kgf/1mm 0.15	—	—
4				kgf/1mm 0.2	kgf/1mm 0.3	
5				kgf/1mm 0.2	kgf/1mm 0.3	kgf/1mm 0.6
6						
8						
10						
13						
16				kgf/1mm 1.0		
18	kgf/1mm 0.05	kgf/1mm 0.1	kgf/1mm 0.3	kgf/1mm 0.4	kgf/1mm 0.5	kgf/1mm 1.5
22	—	—				
27	—	—				
Fmax	F = L × 60%	F = L × 45%	F = L × 40%	F = L × 40%	F = L × 35%	F = L × 30%

※ (L) サイズの許容タワミ量

- WTT 6-55 Fmax = L × 35%
- WTT 6-60 Fmax = L × 35%
- WTT 6-65 Fmax = L × 35%
- WTT 6-70 Fmax = L × 35%
- WTT 6-80 Fmax = L × 35%

	Order 注文例	形式 D - 全長 L 例 WTT10 - 60
	Delivery 納期	2日目着 (又は2日目発送)