


COIL SPRING

丸線コイルスプリング WMM

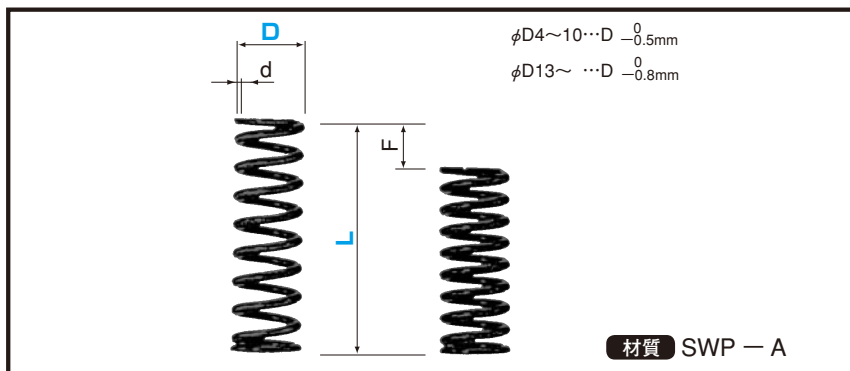

●規格仕様

D \ TYPE	WRR	WFF	WLL	WTT	WMM	WHH			
3	kgf/1mm 0.03	kgf/1mm 0.05	kgf/1mm 0.1	kgf/1mm 0.15	—	—			
4					kgf/1mm 0.2	kgf/1mm 0.3			
5				kgf/1mm 0.2	kgf/1mm 0.3	kgf/1mm 0.6	kgf/1mm 0.2	kgf/1mm 0.3	
6									
8									
10									
13									kgf/1mm 1.0
16									
18	kgf/1mm 0.05	kgf/1mm 0.1	kgf/1mm 0.3	kgf/1mm 0.4	kgf/1mm 0.5	kgf/1mm 1.5			
22	—	—							
27	—	—							
Fmax	F = L × 60%	F = L × 45%	F = L × 40%	F = L × 40%	F = L × 35%	F = L × 30%			

※ (L) サイズの許容タワミ量

WMM 6-60 Fmax=L×30%

WMM 6-65 Fmax=L×29%

WMM 6-70 Fmax=L×28%

WMM 6-80 Fmax=L×28%

	Order	形式 D - 全長 L
	注文例	例 WMM4 - 20

	Delivery	2日目着
	納期	(又は 2日目発送)