


COIL SPRING

丸線コイルスプリング WHH

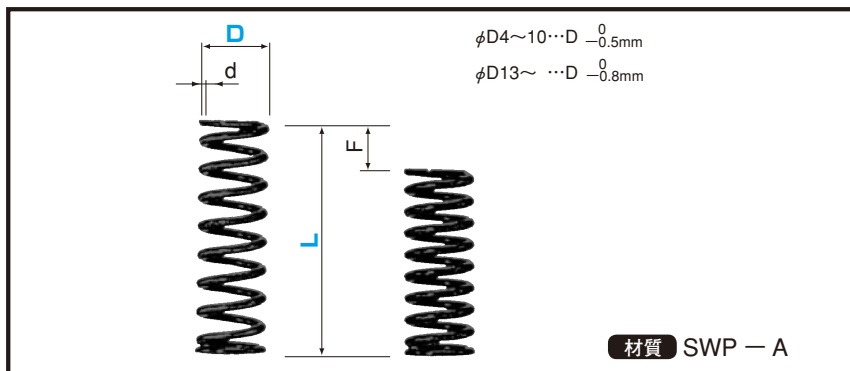

●規格仕様

D \ TYPE	WRR	WFF	WLL	WTT	WMM	WHH			
3	kgf/1mm 0.03	kgf/1mm 0.05	kgf/1mm 0.1	kgf/1mm 0.15	—	—			
4						kgf/1mm 0.2	kgf/1mm 0.3		
5				kgf/1mm 0.2	kgf/1mm 0.3	kgf/1mm 0.6	kgf/1mm 0.2	kgf/1mm 0.3	kgf/1mm 1.0
6									
8									
10									
13									
16									
18	kgf/1mm 0.05	kgf/1mm 0.1	kgf/1mm 0.3	kgf/1mm 0.4	kgf/1mm 0.5	kgf/1mm 1.5			
22	—	—							
27	—	—							
Fmax	F = L × 60%	F = L × 45%	F = L × 40%	F = L × 40%	F = L × 35%	F = L × 30%			

※(L)サイズの許容タワミ量

- WHH 6 - 45 Fmax = L × 25%
- WHH 6 - 50 Fmax = L × 20%
- WHH 6 - 55 Fmax = L × 26%
- WHH 6 - 60 Fmax = L × 23%
- WHH 6 - 65 Fmax = L × 21%
- WHH 6 - 70 Fmax = L × 21%
- WHH 8 - 65 Fmax = L × 26%
- WHH 8 - 70 Fmax = L × 27%

	Order	形式 D - 全長 L
	注文例	例 WHH4 - 20

	Delivery	2 日目着
	納期	(又は 2 日目発送)