
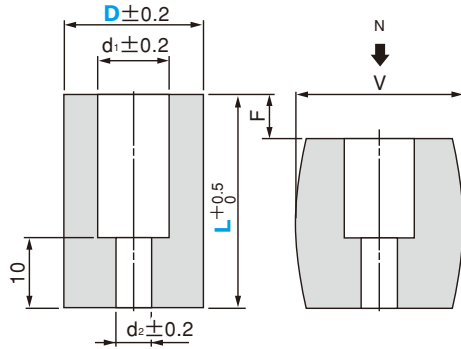


URETHANE SPRING

座ぐり穴ウレタン



TZ



硬度 ショア A90

●規格仕様

発注 No. D-L	D	d ₁	d ₂	M	L	たわみ 10%		たわみ 15%		たわみ 20%		v
						F mm	N kgf	F mm	N kgf	F mm	N kgf	
TZ 20-25 30 35 40	20	11	7	M6	25	2.5	883	3.7	1079	5.0	1275	24
					30	3.0		4.5		6.0		
					35	3.5		5.2		7.0		
					40	4.0		6.0		8.0		
TZ 25-25 30 35 40	25	11	7	M6	25	2.5	1177	3.7	1569	5.0	1765	29
					30	3.0		4.5		6.0		
					35	3.5		5.2		7.0		
					40	4.0		6.0		8.0		
TZ 30-30 35 40	30	14	9	M8	30	3.0	2550	4.5	3040	6.0	3530	35
					35	3.5		5.2		7.0		
					40	4.0		6.0		8.0		
TZ 40-30 35 40	40	18	11	M10	30	3.0	4119	4.5	5099	6.0	5884	46
					35	3.5		5.2		7.0		
					40	4.0		6.0		8.0		

$N = \text{kgf} \times 9.80665$



**Order
注文例**


形式

AZ20-30




**Delivery
納期**

3日目着
(又は3日目発送)



TZX
(全長指定タイプ)



硬度 ショア A90

D	D
25	
30	± 0.2
40	
50	± 0.3
60	
80	± 0.4
100	

発注 No.	D	L 指定 1mm 単位	M	H 指定 1mm 単位
TZX	25	20 ~ 80	M6	5 ≤ H < L
	30		M8	
	40			
	50	25 ~ 150	M10	
	60		M12	
	80		M12	
100	25 ~ 200	M16		

M	d ₁	d ₂
M6	11	7
M8	14	9
M10	18	11
M12	20	14
M16	26	18



**Order
注文例**

形式 D-L-M-H

TZX25-42-M6-15



**Delivery
納期**

3日目着
(又は3日目発送)