


スプールリテーナ

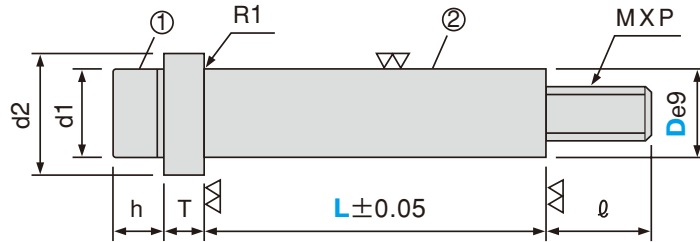

- ① 材質 SCM435 強度区分 12.9
- ② 材質 S45C 硬度 30 ~ 35HRC
- 表面処理 四三酸化鉄被膜 (Fe₃O₄)

●規格仕様

カタログ No.	L																								
記号	D																								
STSC	10	10	15	20	25	30	35	40	45	50															
											55	60	65	70	75	80									
																85	90	100							
	13	15	20	25	30	35	40	45	50																
											55	60	65	70	75	80									
																85	90	100	110	120					
	16	20	25	30	35	40	45	50	55	60	65														
												70	75	80	85	90	100	110	120						
																				130	140	150			
	20	30	35	40	45	50	55	60	65	70															
												75	80	85	90	100	110	120							
																						130	140	150	160
25	40	45	50	55	60	65	70	75	80																
											85	90	100	110	120										
																							130	140	150
32	60	70	80	90	100																				

●規格仕様

De9	d1	d2	M × P	h	T	ℓ
10 - 0.025 - 0.061	10	15	6 × 1.0	6	5	10
13 - 0.032	13	18	8 × 1.25	8	5	15
16 - 0.075	16	24	10 × 1.5	10	8	22
20 - 0.040	18	28	12 × 1.75	12	10	20
25 - 0.092	24	36	16 × 2.0	16	13	27
32 - 0.050 - 0.112	30	45	20 × 2.5	20	16	34

●追加工

追加工項目	コード	内容
寸法	全長	LC
		Lmin ≤ LC < Lmax L ± 0.05 指定 0.1mm 単位 ボルト ℓ 寸法は LC に合わせて調整します

Order

注文例

形式 D - 全長 L

例 **STSC32 - 150**

Delivery

納期

4 日目着

(又は 4 日目発送)